

DC Light ApS
Handverkerbyen 10
DK-2670 Greve
Denmark


Rillo Maxi RB






EN60598/CEM2001/108/CE




Anslutn: 230V-50Hz
850° C-IP65
Temp: -20° C/+50° C
Sockel: LED-Platta
Ljuskälla: LED 28W
PC hus/PC diffuser



Note: Kelvin change switch is placed inside the luminaire, on the LED plate.
Disconnect the power before operation.
Settings are 3000K/3500K/4000K, factory setting is 3000K.

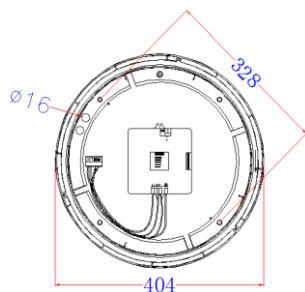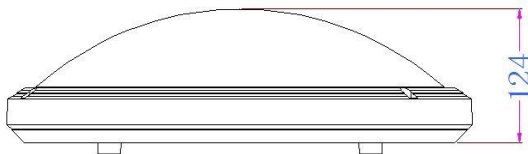

PC Hus



Ring monteras med torx 20 skruvmejsel



Montringshål 2st med cc 328mm enligt ovan
Vid utanpåliggande kabel montage använd medföljande distans ringar.



Använd bifogade packning och bricka för att upprätthålla IP klass

2st $\varnothing 16$ införingshål med tätningar

